



C Android failing

CLI passing

This project provides a simple Android app that interfaces with mobile data collection software to allow fingerprint templates to be scanned as part of an <u>XLSForm</u>. We also provide a second app, designed to be run on a computer workstation, which can compare two fingerprint templates and return a matching score.

Compatibility

Platform	App & version	Compatibility		
ODK	ODK Collect v2022.3	YES		
KoBoToolbox	KoboCollect v2022.1.2	YES		
SurveyCTO	SurveyCTO Collect v2.72	YES		
CommCare	CommCare v8	Only with Advanced Plan or higher		
Ona	ODK COllect v2022.3	YES		

This platform should work with all platforms that are based on ODK.


System design

The novel biometrics system consists of two components. The first component is "Keppel", a smartphone app designed to run on Google Android operating systems. This app provides an I/O interface between the ODK Collect app and an ANSI INCITS 378-2004 compliant electronic fingerprint reader/sensor device. The app has to be sideloaded (it isn't on play store yet).

A really important point here is that the system is not simply taking photographs of fingerprints. The data are stored as concise code which has a very 'lite' impact on the size of the data stored in ODK and also requires no use of attachments. The fingerprint data are captured as plain text that is stored and encrypted along with other ODK data.

The Keppel Smartphone app was designed using <u>Android Studio and Software Development Kit (SDK</u>). The initial version of the app works only with the low cost (<£50) Mantra MFS100 Biometric C-Type Fingerprint

Scanner from <u>Mantra Softech Inc</u>, functionality for which was based on code templates provided within the <u>Mantra MFS100 Software Development Kit</u>.

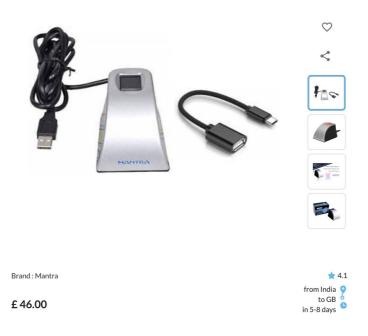

The app was designed with a view to making the addition of further biometric sensors relatively simple. A software 'demo' scanner is also included, and this allows users to test their fingerprint supported ODK forms without having a scanner connected.

Security and Privacy

Please be aware that fingerprints (or any form of biometric data) are very sensitive personal data. Collecting them may help your programme or study but make sure to fully consider privacy and security concerns when doing so. Please consider carrying out a data protection impact assessment prior to data collection.

If you're collecting any personal information using ODK it would be a good idea to look into <u>encrypting forms</u> and also to read ODK's <u>general documentation on security</u>.

Usage

Install the Keppel App on your Android phone or tablet

Download the latest release and sideload the APK file on to your Android device

Scanning fingerprints in ODK XLSform format

To setup a form to scan fingerprints the devices used for data collection will all need the app installed. It can be downloaded <u>here</u>. The app integrates with ODK Collect's <u>External app widget</u> using the uk.ac.lshtm.keppel.android.SCAN intent. An example <u>XML form</u> and <u>XLS Form</u> are provided.

Forms should be added to your ODK system as usual, via ODK Central.

To capture all the fingers of one hand, your XLS form would look like this.

1	type	name	label	appearance	required	bind::odk:length constraint
	begin_group	scan1.	Please Scan the fingers of the right hand	field-list		
35	text	R.THUMB	Right Thumb	ex:uk.ac.lshtm.keppel.android.SCAN		10000
36	text	R.INDEX	Right Index	ex:uk.ac.lshtm.keppel.android.SCAN		10000
37	text	R.MIDDLE	Right Middle	ex:uk.ac.lshtm.keppel.android.SCAN		10000
38	text	R.RING	Right Ring	ex:uk.ac.lshtm.keppel.android.SCAN		10000
39	text	R.PINKIE	Right Pinkie	ex:uk.ac.lshtm.keppel.android.SCAN		10000
40	end group					

The images below show how this looks in ODK Collect. Clicking 'launch' in ODK Collect opens the external app. Pressing 'capture' activates the scanner. Once the template has been captured, the data are returned to ODK Collect as plain text (N.B. Here I'm using the dummy scanner)

digia.vu Piases Scan the fingers of the right hand Right Thumb Launch Right Ring Right Rig	10:33 🛐 🕜 🔤 📲		•	► <u>a</u> d @ 8	6%
Right Index Launch Right Index Launch Right Ring Launch Right Pinkie Launch Note P @ Image: A content of the right hand Right Thumb Launch Image: A content of the right hand Right Middle Launch Image: A content of the right hand Right Thumb Launch Image: A content of the right hand Right Middle Launch Right Pinkie Launch	leja_vu		8	۲.	:
Launch Sight Index Launch Sight Middle Launch Sight Ring Launch Sight Pinkie Launch Sight Pinkie Launch Sight Pinkie Launch Sight Middle Launch Sight Thumb Launch Sight Thumb Launch Sight Middle Sight Pinkie Sight Pi		of the right hand			
Right Index Launch Right Middle Launch Right Pinkie Launch Right Pinkie Launch Right Pinkie Caunch Right Pinkie Launch Right Ring Right Right Ring Right Ring Right Right Ri	Right Thumb	Launch			
Right Middle Right Ring Launch Right Pinkie Launch Right Pinkie Launch NEXT > Please Re-scan the fingers of the right hand Right Thumb Launch Calense: Right Index Right Index Right Middle Launch Right Niddle Launch Right Middle Launch Kight Ring Launch Kight Pinkie K					
Right Middle Right Ring Right Pinkie Launch Right Pinkie Launch Right Pinkie Launch Right Nindel Launch Right Nindel	Right Index				
Right Ring Right Pinkie Canch Right Pinkie Coo D C C C C C C C C C C C C C C C C C		Launch			
Right Ring Right Pinkie BACK	Pight Middle				
Launch Right Pinkie Launch € BACK NEXT > • C BACK NEXT > • C BACK NEXT > • C BACK • C B	Right Middle	Launch			
Launch Right Pinkie Launch < BACK					
Right Pinkie Launch Launch Launch Launch Launch Launch Launch Right Thumb Launch Right Middle Launch Right Middle Launch Right Middle Launch Right Middle Launch Right Ring Launch Right Pinkie Right Pinkie Right Pinkie Right Pinkie Right Pinkie Right Pin	Right Ring				
<pre>Launch Launch Launch Launch Launch Launch Launch Launch Canon-finger-print-iso-template Right Index Launch Launch Right Middle Launch Launch Launch Launch Canon Right Ring Launch Launch</pre>		Launch			
Launch C BACK NEXT > C BACK	Right Pinkie				
 I SO III OF S + 1 I SO III OF		Launch			
 I aunch Right Middle Launch Right Ninde Right Ring Launch Right Pinkie Launch Kaunch <l< td=""><td></td><td></td><td></td><td></td><td></td></l<>					
tess IP ● ■ + + + + + + + + + + + + + + + + + +	< BACK			NEX	T >
deja_vu Pease Re-scan the fingers of the right hand Right Thumb Caunch Caunch Right Middle Right Middle Right Ring Caunch Right Ring Caunch Right Pinkie Caunch Right Pinkie	•				
Please Re-scan the fingers of the right hand Right Thumb demo-finger-print-iso-template Right Index Launch Right Middle Launch Right Ring Launch	10:50 33 🕞 🔤 👎	•	•	►⊿ @ 8:	5%
Right Thumb Launch demo-finger-print-iso-template Right Index Launch Right Middle Launch Right Ring Right Pinkie Launch Kight Pinkie Launch	deja_vu		8	٩.	:
Launch demo-finger-print-iso-template Right Index Launch Right Middle Launch Right Ring Launch		ers of the right hand	d		
Right Index Launch Right Middle Right Ring Right Pinkie Launch Kaunch Right Pinkie Launch		Launch			
Launch Right Middle Launch Right Pinkie Launch Kight Pinkie Launch	demo-finger-print-is				
Right Middle Launch Right Ring Right Pinkie Launch K BACK NEXT >	Right Index				
Launch Right Ring Right Pinkie Launch < BACK NEXT ▶		Launch			
Launch Right Ring Right Pinkie Launch < BACK NEXT >	Diabt Middl-				
Right Ring Launch Right Pinkie Launch KBACK NEXT >		Launch			
Launch Right Pinkie Launch < BACK					
Right Pinkie	Right Ring				
< BACK NEXT >		Launch			
< BACK NEXT >	Pight Diples				
< BACK NEXT >		Launch			
< • •	< BACK			NEX	T >
		۲			

ODK data downloads

When you download your data CSV file from ODK Central, your fingerprint templates will be stored as plain text in line with other data from the form. From here you can either test them one at a time, or use a script to automate batch processing.

SubmissionDate	ID	scan1R.THUMB	UUID
2021-12- 21T18:19:36.622Z	001	464d52002032300000000f60000013c016200c500c5010000006424808b00ca7664	uuid:4f1f19e2- 846a-42d7- aef2- 0574474a993b
2021-12- 21T19:25:32.123Z	002	464d520020323000000009c0000013c016200c500c5010000003415408c00e0874c	uuid:2382975e- 52bb-4a6b- 880f- 49bc5c27e787
2021-12- 22T09:14:09.431Z	003	464d520020323000000000ae0000013c016200c500c5010000006418409200cb7b	uuid:f7a0ab80- 9d46-423a- 9e64- 28a0b3fb7076
2021-12- 22T12:00:11.682Z	004	464d52002032300000000d80000013c016200c500c501000000461f807f00eed71	uuid:9d55c0a9- 901a-4908- b553- 8a43a0b4037e

Install the Keppel CLI on your workstation

Unzip the keppel-cli.zip. Open a terminal and do the following to copy all required applications and libraries to your /usr/local/bin folder

```
foo@bar:~$ cd keppel-cli
foo@bar:~$ ./install.sh
```

Test the installation with

```
foo@bar:~$ keppel
```

you should see the help dialog

```
foo@bar:~$ keppel
Usage: keppel [OPTIONS] COMMAND [ARGS]...
Options:
    -h, --help Show this message and exit
Commands:
    match Match two hex encoded ISO fingerprint templates. Threshold used for
    matching is 40.0.
```

Matching fingerprints

To match two (hex encoded) fingerprint templates run:

```
foo@bar:~$ keppel match /path/to/first_template /path/to/second_template
15.386568130470566
```

The core function requires that each template is stored in a single line of its own text file. The default behaviour is to return the matching score for the two templates

Other commands

To see available commands type

```
foo@bar:~$ keppel match -h
```

From version 0.3, the following options are available

-p

Treats TEMPLATEONE and TEMPLATETWO as plain text rather than file This option is very useful for scripted analysis

Example [templates truncated]

```
foo@bar:~$ keppel match -p 464d52002032300000001080000013c016200c500c5... 464d520020323(
15.386568130470566
```

-ms

Return whether templates match along with score like "match_210.124"

-m

Return whether templates match (either "match" or "mismatch")

-t FLOAT

Threshold (score) to be used to determine whether templates are a match or mismatch

-h, --help Show this message and exit`

Controlling the Keppel CLI with R

<u>R</u> is our favourite application for data munging, analysis and statistics. R plays nicely with system tools and can be used to control the Keppel API.

In R, we created a very simple wrapper function that runs the Keppel CLI and returns a match score. As with any R function, this can be applied to lists, arrays and tibbles (data frames) to perform batch actions.

On an off-the-shelf MacBook Pro with 2.3 GHz 8-Core Intel Core i9 and 32 GB RAM, it took approximately 71 seconds to process 200 template matching calls sequentially.

```
library(furrr)
library(future)
plan(sequential)
system.time(future_map2(
   .x = df$scan1,
   .y = df$scan2,
   .f = fingerprint.score))
user system elapsed
101.276 16.056 71.427
```

Called in parallel using the *furrr* and *future* packages, the process is much faster

```
library(furrr)
library(future)
plan(multisession, workers = 16)
system.time(future_map2(.x = df$scan1..R.THUMB,.y = df$scan2..R.THUMB.2,.f = fingerprint.
user system elapsed
1.261 0.059 16.467
```

Processing n templates using the parallel approach (16 cores) took

n	Cores	time (s)	time/call (s)
200	1	68.6	0.343
400	1	140.2	0.350
200	16	16.5	0.083
400	16	30.86	0.077
1000	16	25.0	0.025
2000	16	69.7	0.034
10000	16	773.4	0.077

Creating an Android release

Hopefully the current release will continue to work with future versions of ODK Collect. At present we are passively updating the app as needed. Collaborators are welcome to continue to develop the app and to create new releases.

Prerequisites: You will need to install both a JDK and the Android SDK to build a release. The easiest way to install Android is to download <u>Android Studio</u> and import the project in <u>Android</u> into it. This takes care of downloading the correct Android dependencies for you.

To create a release:

- 1. Update the versionCode and versionName in Android/app/build.gradle for the release. versionCode should be any number higher than the current value.
- 2. Commit the changes: bash git add Android/app/build.gradle git commit -m "Update versionName and versionCode"
- 3. Tag the latest commit and push the changes: bash git tag <versionName> git push git push --tags
- 4. Run ./import-device-sdks.sh and follow any instructions to make sure device SDKs are setup correctly
- 5. Run ./build-android-release.sh to build the signed release APK
- Navigate to https://github.com/chrissyhroberts/ODK Fingerprints Mantra/tags, click your new tag, click "Edit tag"
- 7. Set the versionName as the "Release title", attach the signed release APK and hit "Publish release" 🛁

Creating a CLI release

Prerequisites: You will need to install a JDK

To create a release:

- 1. Tag the latest commit and push: bash git tag <versionName> git push --tags
- 2. Run ./build-cli-release.sh to package the CLI
- 3. Navigate to https://github.com/chrissyhroberts/ODK Fingerprints Mantra/tags, click your new tag, click "Edit

tag"

4. Set the "Release title", attach the .zip package and hit "Publish release" 🛁

Supported devices

Mantra MFS100

Mantra Softech India Private Limited

- Mantra is a leading manufacturer and developer of Biometric devices, software and solutions from 2006 onwards.
- The biometric-based technology offers a dependable, helpful, and authentic way of verifying/identifying an individual's identity utilizing latest Biometric fingerprint scanner.
- Fingerprint scanners are being used broadly for enrollment, identification & verification in varied projects where the identity of people is required.
- Mantra's biometric fingerprint devices offer superior execution, accuracy, and continuance.
- Our wide ranges of fingerprint scanner devices deliver quick personality verification with a high level of security in a consistent way for various Citizen or Person identity ventures.

Mantra's MFS100 - Biometric Fingerprint Scanner

- FBI and STQC certified single finger scanner MFS100 is high quality USB fingerprint sensor for fingerprint authentication in desktop or network security.
- MFS100 is based on optical sensing technology which efficiently recognizes poor quality fingerprints also.
- MFS100 can be used for authentication, identification and verification functions that let your fingerprint act like digital passwords that cannot be lost, forgotten or stolen.
- Hard optical sensor is resistant to scratches, impact, vibration and electrostatic shock.
- Lowest FAR and FRR NIST complied interoperable template format standards (ANSI378 /ISO19794-2). Compatibility with ISO 19794-4 and ISO 19794-2 for fingerprint capture and verification.
- Apart from FBI and STQC, MFS100 is CE, FCC, RoHS, WHQL, CB 60950 approved. Equivalent to FBI PIV certification.
- Supports operating system plaforms like Windows 98 SE, Me, 2000, XP, Windows7, windows vista, windows server(2003/2007/2008) and Linux.
- SDK, Libraries and drivers support across all mentioned platforms. (32 bit/64 bit) Easy integration into product servers and application support

Why the name?

This project was created by researchers at the London School of Hygiene & Tropical Medicine. Our mission is to improve health and health equity in the UK and worldwide; working in partnership to achieve excellence in public and global health research, education and translation of knowledge into policy and practice. LSHTM's main building is situated on Keppel Street in London's Bloomsbury district. The Keppel App and CLI are named after the street where you will find us and not after any (no doubt problematic) historical figures who may have given their name to the street.

Funding & Ethics

This work was funded by the UK Department of Health and Social Care using UK Aid funding managed by the

NIHR (PR-OD-1017-20001). Ethical permission for elements of the work that handled fingerprint templates from living humans was granted by the London School of Hygiene & Tropical Medicine Observational Research Ethics Committee (Ref. 22562).

